
FERTINET

FortiGate/FortiWiFi® 40F Series

Secure SD-WAN Next Generation Firewall



The FortiGate/FortiWiFi 40F series provides a fast and secure SD-WAN solution in a compact fanless desktop form factor for enterprise branch offices and mid-sized businesses. Protects against cyber threats with system-on-a-chip acceleration and industry-leading secure SD-WAN in a simple, affordable, and easy to deploy solution. Fortinet's Security-Driven Networking approach provides tight integration of the network to the new generation of security.

Security

- Identifies thousands of applications inside network traffic for deep inspection and granular policy enforcement
- Protects against malware, exploits, and malicious websites in both encrypted and non-encrypted traffic
- Prevents and detects against known attacks using continuous threat intelligence from AI-powered FortiGuard Labs security services
- Proactively blocks unknown sophisticated attacks in realtime with the Fortinet Security Fabric integrated AI-powered FortiSandbox

Performance

- Engineered for Innovation using Fortinet's purpose-built security processors (SPU) to deliver the industry's best threat protection performance and ultra-low latency
- Provides industry-leading performance and protection for SSL encrypted traffic including the first firewall vendor to provide TLS 1.3 deep inspection

Certification

- Independently tested and validated best security effectiveness and performance
- Received unparalleled third-party certifications from NSS Labs, ICSA, Virus Bulletin, and AV Comparatives

Networking

- Application aware routing with in-built SD-WAN capabilities to achieve consistent application performance and the best user experience
- Built-in advanced routing capabilities to deliver high performance with encrypted IPSEC tunnels at scale

Management

- Includes a management console that is effective and simple to use, which provides a comprehensive network of automation & visibility
- Provides Zero Touch Provisioning leveraging Single Pane of Glass Management powered by the Fabric Management Center
- Predefined compliance checklists analyze the deployment and highlight best practices to improve the overall security posture

Security Fabric

- Enables Fortinet and Fabric-ready partners' products to provide broader visibility, integrated end-to-end detection, threat intelligence sharing, and automated remediation
- Automatically builds Network Topology visualizations which discover IoT devices and provide complete visibility into Fortinet and Fabric-ready partner products

Firewall	IPS	NGFW	Threat Protection	Interfaces
5 Gbps	1 Gbps	800 Mbps	600 Mbps	Multiple GE RJ45 WiFi variants

Deployment


Next Generation Firewall (NGFW)


- Reduce the complexity and maximize your ROI by integrating threat protection security capabilities into a single highperformance network security appliance, powered by Fortinet's Security Processing Unit (SPU)
- Full visibility into users, devices, applications across the entire attack surface and consistent security policy enforcement irrespective of asset location
- Protect against network exploitable vulnerabilities with industryvalidated IPS that offers low latency and optimized network performance
- Automatically block threats on decrypted traffic using the Industry's highest SSL inspection performance, including the latest TLS 1.3 standard with mandated ciphers
- Proactively block newly discovered sophisticated attacks in real-time with Al-powered FortiGuard Labs and advanced threat protection services included in the Fortinet Security Fabric


(\mathcal{O})

Secure SD-WAN

- Consistent business application performance with accurate detection, dynamic WAN path steering and optimization
- Multi-cloud access for faster SaaS adoption with end-toend optimization
- Simplification with zero touch deployment and centralized management with auto-provisioning, analytics and reporting
- Strong security posture with next generation firewall and realtime threat protection








FortiGate 40F deployment in Enterprise Branch (Secure SD-WAN)

Hardware

FortiGate/FortiWiFi 40F Series

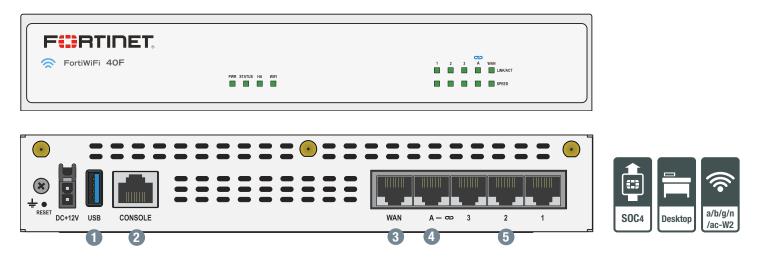

Interfaces

- 1. USB Port
- 2. Console Port
- 3. 1x GE RJ45 WAN Port

- 4. 1x GE RJ45 FortiLink Port
- 5. 3x GE RJ45 Ethernet Ports

Powered by Purpose-built Secure SD-WAN ASIC SOC4



- Combines a RISC-based CPU with Fortinet's proprietary Security Processing Unit (SPU) content and network processors for unmatched performance
- Delivers industry's fastest application identification and steering for efficient business operations
- Accelerates IPsec VPN performance for best user experience on direct internet access
- Enables the best of breed NGFW Security and Deep SSL Inspection with high performance
- Extends security to access layer to enable SD-Branch transformation with accelerated and integrated switch and access point connectivity

3G/4G WAN Connectivity

The FortiGate 40F Series includes a USB port that allows you to plug in a compatible third-party 3G/4G USB modem, providing additional WAN connectivity or a redundant link for maximum reliability.

Compact and Reliable Form Factor

Designed for small environments, you can place it on a desktop or wall-mount it. It is small, lightweight yet highly reliable with a superior MTBF (Mean Time Between Failure), minimizing the chance of a network disruption.

Extends Security to Access Layer with FortiLink Ports

FortiLink protocol enables you to converge security and the network access by integrating the FortiSwitch into the FortiGate as a logical extension of the NGFW. These FortiLink enabled ports can be reconfigured as regular ports as needed.



Fortinet Security Fabric

Security Fabric

The Security Fabric is the cybersecurity platform that enables digital innovations. It delivers broad visibility of the entire attack surface to better manage risk. Its unified and integrated solution reduces the complexity of supporting multiple-point products, while automated workflows increase operational speeds and reduce response times across the Fortinet deployment ecosystem. The Fortinet Security Fabric overs the following key areas under a single management center:

- Security-Driven Networking that secures, accelerates, and unifies the network and user experience
- Zero Trust Network Access that identifies and secures users and devices in real-time, on and off of the network
- Dynamic Cloud Security that protects and controls cloud infrastructures and applications
- Al-Driven Security Operations that automatically prevents, detects, isolates, and responds to cyber threats

FortiOS

FortiGates are the foundation of the Fortinet Security Fabric—the core is FortiOS. All security and networking capabilities across the entire FortiGate platform are controlled with one intuitive operating system. FortiOS reduces complexity, costs, and response times by truly consolidating next-generation security products and services into one platform.

- A truly consolidated platform with a single OS and pane-of-glass for across the entire digital attack surface.
- Industry-leading protection: NSS Labs Recommended, VB100, AV Comparatives, and ICSA validated security and performance.
- Leverage the latest technologies such as deception-based security.



- Control thousands of applications, block the latest exploits, and filter web traffic based on millions of real-time URL ratings in addition to true TLS 1.3 support.
- Automatically prevent, detect, and mitigate advanced attacks within minutes with an integrated Al-driven security and advanced threat protection.
- Improve and unify the user experience with innovative SD-WAN capabilities with the ability to detect, contain, and isolate threats with automated segmentation.
- Utilize SPU hardware acceleration to boost network security performance.

Services



FortiGuard[™] Security Services

FortiGuard Labs offer real-time intelligence on the threat landscape, delivering comprehensive security updates across the full range of Fortinet's solutions. Comprised of security threat researchers, engineers, and forensic specialists, the team collaborates with the world's leading threat monitoring organizations and other network and security vendors, as well as law enforcement agencies.

G

FortiCare[™] Support Services

Our FortiCare customer support team provides global technical support for all Fortinet products. With support staff in the Americas, Europe, Middle East, and Asia, FortiCare offers services to meet the needs of enterprises of all sizes.

For more information, please refer to forti.net/fortiguard and forti.net/forticare

Specifications

	FORTIGATE 40F FORTIWIFI 40F	
Hardware Specifications		
GE RJ45 WAN / DMZ Ports	1	
GE RJ45 Internal Ports	3	
GE RJ45 FortiLink Ports	1	
GE RJ45 PoE/+ Ports	-	
Wireless Interface	– 802.11 a/b/g/n/ac-W	V2
USB Ports	1	
Console (RJ45)	1	
Internal Storage	-	
System Performance — Enterprise Traffic Mix		
IPS Throughput ²	1 Gbps	
NGFW Throughput ^{2, 4}	800 Mbps	
Threat Protection Throughput ^{2, 5}	600 Mbps	
System Performance		
Firewall Throughput	5/5/5 Gbps	
(1518 / 512 / 64 byte UDP packets)		
Firewall Latency (64 byte UDP packets)	4 μs	
Firewall Throughput (Packets Per Second)	7.5 Mpps	
Concurrent Sessions (TCP)	700,000	
New Sessions/Second (TCP)	35,000	
Firewall Policies	5,000	
IPsec VPN Throughput (512 byte) ¹	4.4 Gbps	
Gateway-to-Gateway IPsec VPN Tunnels	200	
Client-to-Gateway IPsec VPN Tunnels	250	
SSL-VPN Throughput	490 Mbps	
Concurrent SSL-VPN Users	200	
(Recommended Maximum, Tunnel Mode)	01014	
SSL Inspection Throughput (IPS, avg. HTTPS) ³	310 Mbps	
SSL Inspection CPS (IPS, avg. HTTPS) ³	320	
SSL Inspection Concurrent Session (IPS, avg. HTTPS) ³	55,000	
Application Control Throughput (HTTP 64K) ²	990 Mbps	
CAPWAP Throughput (HTTP 64K)	3.5 Gbps	
Virtual Domains (Default / Maximum)	10 / 10	
Maximum Number of FortiSwitches Supported	8	
Maximum Number of FortiAPs (Total / Tunnel Mode)	16/8	
Maximum Number of FortiTokens	500	
High Availability Configurations	Active / Active, Active / Passive, Clustering	

DimensionsHeight x Width x Length (inches)1.5 x 8.5 x 6.3Height x Width x Length (mm)38.5 x 216 x 160Weight2.2 lbs (1 kg)Form FactorDesktopOperating Environment and CertificationsInput RatingInput Rating12Vdc, 3APower RequiredPowered by External DC Power Adapter, 100–240V AC, 50–60 HzMaximum Current100V AC / 0.2A, 240V AC / 0.1APower Consumption (Average / Maximum)12.4 W / 15.4 W13.6 W / 16.6 WHeat Dissipation52.55 BTU/hr56.64 BTU/hrOperating Temperature32–104°F (0–40°C)Storage Temperature-31–158°F (-35–70°C)Humidity10–90% non-condensingNoise LevelFanless 0 dBAOperating AltitudeUp to 7,400 ft (2,250 m)ComplianceFCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CBCertificationsICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPNRadio Specifications		FORTIGATE 40F	FORTIWIFI 40F		
Height x Width x Length (mm) 38.5 x 216 x 160 Weight 2.2 lbs (1 kg) Form Factor Desktop Operating Environment and Certifications 12Vdc, 3A Power Required Powered by External DC Power Adapter, 100–240V AC, 50–60 Hz Maximum Current 100V AC / 0.2A, 240V AC / 0.1A Power Consumption (Average / Maximum) 12.4 W / 15.4 W 13.6 W / 16.6 W Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications ISA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications - 3x3 Maximum Wi-Fi Speeds - 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Dimensions				
Height x Width x Length (mm) 38.5 x 216 x 160 Weight 2.2 lbs (1 kg) Form Factor Desktop Operating Environment and Certifications 12Vdc, 3A Power Required Powered by External DC Power Adapter, 100–240V AC, 50–60 Hz Maximum Current 100V AC / 0.2A, 240V AC / 0.1A Power Consumption (Average / Maximum) 12.4 W / 15.4 W 13.6 W / 16.6 W Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications ISA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications - 3x3 Maximum Wi-Fi Speeds - 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Height x Width x Length (inches)	1.5 x 8	1.5 x 8.5 x 6.3		
Weight 2.2 lbs (1 kg) Form Factor Desktop Operating Environment and Certifications Input Rating Input Rating 12Vdc, 3A Power Required Powered by External DC Power Adapter, 100–240V AC, 50–60 Hz Maximum Current 100V AC / 0.2A, 240V AC / 0.1A Power Consumption (Average / Maximum) 12.4 W / 15.4 W 13.6 W / 16.6 W Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Height x Width x I ength (mm)	38.5 x 2	216 x 160		
Form Factor Desktop Operating Environment and Certifications Input Rating 12Vdc, 3A Power Required Powered by External DC Power Adapter, 100–240V AC, 50–60 Hz Maximum Current 100V AC / 0.2A, 240V AC / 0.1A Power Consumption (Average / Maximum) 12.4 W / 15.4 W 13.6 W / 16.6 W Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2.250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications	Weight	2.2 lt	os (1 kg)		
Input Rating 12Vdc, 3A Power Required Powered by External DC Power Adapter, 100–240V AC, 50–60 Hz Maximum Current 100V AC / 0.2A, 240V AC / 0.1A Power Consumption (Average / Maximum) 12.4 W / 15.4 W 13.6 W / 16.6 W Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fariless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications					
Power Required Powered by External DC Power Adapter, 100–240V AC, 50–60 Hz Maximum Current 100V AC / 0.2A, 240V AC / 0.1A Power Consumption (Average / Maximum) 12.4 W / 15.4 W 13.6 W / 16.6 W Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications	Operating Environment and Certifications				
100–240V AC, 50–60 Hz Maximum Current 100V AC / 0.2A, 240V AC / 0.1A Power Consumption (Average / Maximum) 12.4 W / 15.4 W 13.6 W / 16.6 W Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications	Input Rating	12V	'dc, 3A		
Power Consumption (Average / Maximum) 12.4 W / 15.4 W 13.6 W / 16.6 W Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications 3x3 Muttiple (MU) MIMO – 3x3 Maximum Wi-Fi Speeds 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Power Required				
Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications 3x3 Multiple (MU) MIMO – 3x3 Maximum Wi-Fi Speeds 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Maximum Current	100V AC / 0.24	A, 240V AC / 0.1A		
Heat Dissipation 52.55 BTU/hr 56.64 BTU/hr Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications 3x3 Multiple (MU) MIMO – 3x3 Maximum Wi-Fi Speeds 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Power Consumption (Average / Maximum)	12.4 W / 15.4 W	13.6 W / 16.6 W		
Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications	Heat Dissination	52 55 BTU/hr			
Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications 3x3 Multiple (MU) MIMO – 3x3 Maximum Wi-Fi Speeds _ 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Operating Temperature	32–104°	F (0-40°C)		
Humidity 10–90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications Multiple (MU) MIMO – 3x3 Maximum Wi-Fi Speeds 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Storage Temperature	-31-158°E (-35-70°C)			
Operating Altitude Up to 7,400 ft. (2,250 m) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications - 3x3 Multiple (MU) MIMO - 3x3 Maximum Wi-Fi Speeds - 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Humidity	10-90% non-condensing			
Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications	Noise Level	Fanless 0 dBA			
Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN Radio Specifications	Operating Altitude	Un to 7 /00 ft /2 250 m)			
Multiple (MU) MIMO - 3x3 Maximum Wi-Fi Speeds - 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Compliance				
Multiple (MU) MIMO – 3x3 Maximum Wi-Fi Speeds 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Certifications	ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN			
Maximum Wi-Fi Speeds 1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	Radio Specifications				
	Multiple (MU) MIMO	-	3x3		
	Maximum Wi-Fi Speeds	-			
Maximum Tx Power – 20 dBm	Maximum Tx Power	-	20 dBm		
Antenna Gain 3.5 dBi @ 5GHz, 5 dBi @ 2.4 GHz	Antenna Gain	_			

Note: All performance values are "up to" and vary depending on system configuration.

1. IPsec VPN performance test uses AES256-SHA256.

2. IPS (Enterprise Mix), Application Control, NGFW, and Threat Protection are measured with Logging enabled.

- 3. SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.
- 4. NGFW performance is measured with Firewall, IPS, and Application Control enabled.

5. Threat Protection performance is measured with Firewall, IPS, Application Control, and Malware Protection enabled.

F**:**RTINET.

Order Information

Product	SKU	Description
FortiGate 40F	FG-40F	5 x GE RJ45 ports (including 4 x Internal Ports, 1 x WAN Ports)
FortiWiFi 40F	FWF-40F	5 x GE RJ45 ports (including 4 x Internal Ports, 1 x WAN Ports), Wireless (802.11a/b/g/n/ac-W2)

Bundles



FortiGuard Labs delivers a number of security intelligence services to augment the FortiGate firewall platform. You can easily optimize the protection capabilities of your FortiGate with one of these FortiGuard Bundles.

Bundles	360 Protection	Enterprise Protection	Unified Threat Protection	Threat Protection
FortiCare	ASE 1	24x7	24x7	24x7
FortiGuard App Control Service	•	•	•	•
FortiGuard IPS Service	•	•	•	•
FortiGuard Advanced Malware Protection (AMP) — Antivirus, Mobile Malware, Botnet, CDR, Virus Outbreak Protection and FortiSandbox Cloud Service	•	•	•	•
FortiGuard Web Filtering Service	•	•	•	
FortiGuard Antispam Service	•	•	•	
FortiGuard Security Rating Service	•	•		
FortiGuard Industrial Service	•	•		
FortiGuard IoT Detection Service ²	•	•		
FortiConverter Service	•	•		
IPAM Cloud ²	•			
SD-WAN Orchestrator Entitlement ²	•			
SD-WAN Cloud Assisted Monitoring	•			
SD-WAN Overlay Controller VPN Service	•			
FortiAnalyzer Cloud	•			
FortiManager Cloud	•			
	1 0/47	nlun Advanced Convince Tir	akat Handling - 2 Available v	uhan nunning EartiOS 6.4

1. 24x7 plus Advanced Services Ticket Handling 2. Available when running FortiOS 6.4



www.fortinet.com

Copyright © 2020 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiGate®, FortiGate®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signal be binding written contract shall be binding on Fortinet. For absolute clarity, any such warrants will be limited to performance in the same ideal conditions as in Fortinets and, in such event, only the specific performance, presentations, and guarantees pursuant hereto, whether express or implied. Fortinet respress or implied, sceneer to other disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet respress or implied, Fortinet respress he right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable. FST-PROD-DS-GT40F

FGFWF-40F-DAT-R9-202005